TOPBAND
Stock Code: 002139.SZ

TOPBAND Company Video

New Launch

Power Charger Catalog

TOPBAND Stock Code: 002139.SZ

SHENZHEN TOPBAND BATTERY CO.,LTD
Web: www.topbandpower.com
Tel: 0755-27651888-2737
Mail: sales@topbandpower.com
Add: Topband Industrial Park, LiYuan Industrial Zone,
Shiyan, BaoAn District, Shenzhen,China

TOPBAND
Stock Code: 002139.SZ

Portable Power Charger

Wireless Power Consortium Member

Made for MagSafe | Made for WATCH | Made for iPhone | iPad | iPod

amfori BSCI Trade with purpose

CE FC RoHS compliant

ODM SERIVCE

Strong ODM service Team

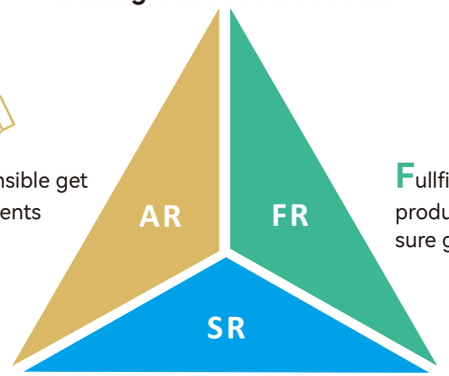

AR

Account **R**esponsible get detailed requirements

Fullfill **R**esponsible provide production schedule and make sure goods delivery in time

Solution **R**esponsible with team members (Project Manager+ID +Mechanical Engineers+Software +Test +Packaging Engineers) provide professional suggestions and realize your idea to real product

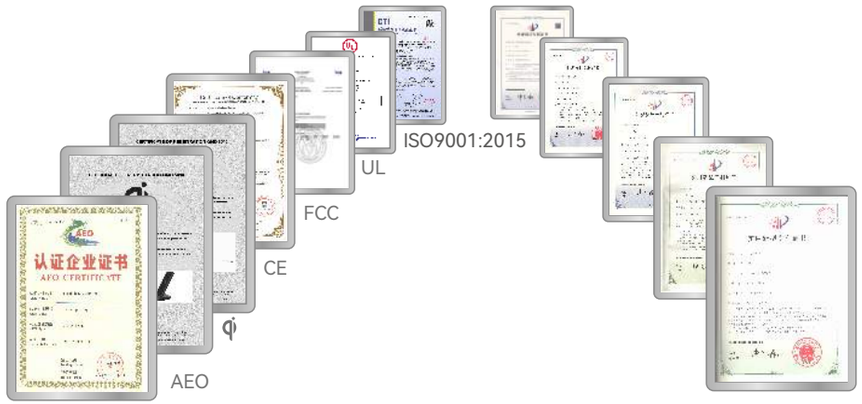

Global Certifications

Patent Protection

CONTENTS

ABOUT US

01 | ODM Serivce
03 | Company Profile
04 | Topband Lab & Production Lines
04 | Topband Production

WE SUPPLY

05 | Power Bank
19 | Qi2 & MagSafe Chargers
26 | Wireless Chargers
31 | GaN Charger
40 | Portable Power Station

The most advanced technology and safest customized power solution service provider!
----Since 2007

Company Profile



Topband was founded in 1996 and became a listed company(Stock code: 002139) In 2007. Currently we have more than 10000 staffs and cover 75000m². We have factories in Shenzhen, India, Vietnam, Huizhou and Chongqing. Intelligent control as Topband's core technology becomes a leading intelligent control solutions supplier with continuous application development.

Topband specialized in Portable Power/Wireless Charger/Power Station since 2007, and we can provide one-stop charging solution to our customers and expect co-innovate a high quality, safe and green charging environment with our customers and partners as an manufacturer, MFI factory/WPC/BSCI/SEDEX etc member.

Topband has strong in-house R&D team and professional automatic production lines, we have CNAS certified Lab and has passed IATF16949:2016 / ISO9001:2015 / ISO14001: 2015/ ISO45001: 2018. We have ultilized 6 SIGEMA, FMEA and other international advanced management philosophy to promote our management. Topband carries out with high safety and quality requirements to ensure its products are consistent with CE, FCC, Qi, RoHS international standards.

Topband Lab

Perfect and complete experimental equipment ensures our quality and ODM research and development strength.

Topband Production

13 Assembly lines

10 SMT lines

28 Aging cabinets

1000K Per month

Power Bank

24000mAh 140W 1.54' TFT Screen Powerbank

- Safe Protection
- PD3.1 Fast Charging
- 3 Devices Charging
- 1.54 Inch TFT Screen
- PD140W Ultimate Loading
- Plug & Play

PD25S

Appearance processing: Painting
Cell capacity: 4000mAh, 21.6V/86.4Wh
Total capacity: 24000mAh, 4000mAh*6
Dimension: 160*55*55mm
Weight: 500g

Input:
USB-C1/C2: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A, 28V/5A (140W Max)
Output:
USB-C1/C2: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A, 28V/5A (140W Max)
PPS: 3.3V-21V/5A (105W Max)
USB-A: 5V/3A, 9V/2A, 12V/1.5A, 10V/2.25A (22.5W Max)
C1+C2: 65W+65W (130W Max)
C1/C2+A: 100W+22.5W (122.5W Max)
C1+C2+A: 65W+65W+22.5W (152.5W Max)

30W/67W 0.96' TFT Retractable Cable Powerbank

- 70cm Retractable Cable
- PD30W/67W Powerbank
- 3 Devices Charging
- TFT Screen

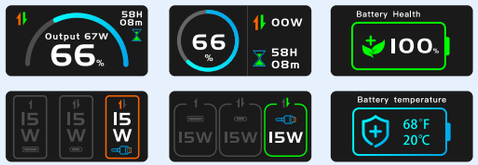

CE FC RoHS compliant UN38.3

3-in-1 10000mAh 30W GaN Charger Powerbank With Bulid in Cable

CE FC RoHS compliant UN38.3

PD37T

Appearance processing: Painting
Battery capacity: 5000mAh, 7.3V/36.5Wh
Total capacity: 10000mAh, (5000mAh*2)
Dimension: 95*50*40mm
Weight: 200g
Retractable Cable Length: 70cm

Input:
USB-C/Cable-C: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A (30W Max)

Output:
USB-C/Cable-C: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A (30W Max)
PPS: 3.3-11V/3A
USB-A: 5V/3A, 9V/2A, 10V/2.25A, 12V/1.5A (22.5W Max)
USB-A+USB-C+Cable-C: 5V/4.5A (22.5W Max)

PD38T

Appearance processing: Painting
Battery capacity: 5000mAh, 14.6V/73Wh
Total capacity: 20000mAh, (5000mAh*4)
Dimension: 135*53*49mm
Weight: 400g
Retractable Cable Length: 70cm

Input:
USB-C/Cable-C: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A (65W Max)

Output:
USB-C/Cable-C: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.35A (67W Max)
PPS: 3.3-21V/3A (63W Max)
USB-A: 5V/3A, 9V/2A, 10V/2.25A, 12V/1.5A (22.5W Max)
Cable-C+USB-C: 45W+20W (65W Max)
USB-C+USB-A: 5V/4.5A (22.5W Max)
Cable-C+USB-C+USB-A: 45W+5V/4.5A (67.5W Max)

- Digital Display
- 10000mAh Battery
- PD30W Max
- GaN Charger
- Build in Cable
- 2 Devices Charging
- Nano Size
- Charge While Using

PD36

Appearance process: Painting
Battery capacity: 5000mAh, 7.3V/36.5Wh (5000mAh*2)
Dimension: 108*51*30mm
Weight: 200g

Input:
AC: 100-240V 50-60Hz 1.5A Max
USB-C/Cable-C: 5V/3A, 9V/3A, 15V/2A, 20V/1.5A (30W Max)

Output:
AC Mode:
USB-C/Cable-C: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/1.5A (30W Max)
PPS: 3.3-11V/5A,
PPS: 3.3-21V/2.25A
USBC+Cable-C: 5V/3.6A (18W Max)
Powerbank Mode:
USB-C/Cable-C: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A (30W Max)
USBC+Cable-C: 5V/3A (15W Max)

10000mAh 30W Watch Wireless Powerbank

- Digital Display
- 10000mAh Battery
- PD30W Powerbank
- Build in Cable
- 3 Devices Charging
- Apple Watch Charger

PD52

Appearance processing: Painting
Battery capacity: 5000mAh, 7.3V/36.5Wh
Total capacity: 10000mAh, (5000mAh*2)
Dimension: 94*51*32.5mm
Weight: 180g

Input:
USB-C/Cable-C: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A (30W Max)

Output:
USB-C/Cable-C: 5V/3A, 9V/3A, 12V/2.92A, 15V/2.33A, 20V/1.5A (30W Max)
Apple Watch: 5W
Total: 5V/4.8A (24W Max)

35W/67W Powerbank With Build in Cable

- Digital Display
- PD35W/67W Max
- Charge While Using
- 3 Devices Charging
- Nano Size
- Build in Cable

PD28S

Appearance processing: Texturing
Battery capacity: 5000mAh, 7.3V/36.5Wh (5000mAh*2)
Dimension: 88*64*26.6mm
Weight: 190g

Input:
USB-C/Cable-C: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A (30W Max)

Output:
USB-C/Cable-C: 5V/3A, 9V/3A, 12V/2.92A, 15V/2.33A, 20V/1.75A (35W Max)
PPS: 3.3-11V/3A,
PPS: 3.3-16V/2A
USB-A: 5V/3A, 9V/2A, 12V/1.5A, 10V/2.25A (22.5W Max)
USB-C+Cable-C+USB-A: 5V/4.5A (22.5W Max)

PD28P

Appearance processing: Texturing
Battery capacity: 5000mAh, 14.6V/73Wh (5000mAh*4)
Dimension: 140*82*27mm
Weight: 380g

Input:
USB-C/Cable-C: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A (65W Max)

Output:
USB-C/Cable-C: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.35A (67W Max)
PPS: 3.3-21V/3A (63W Max)
USB-A: 5V/3A, 9V/2A, 10V/2.25A, 12V/1.5A (22.5W Max)
Cable-C+USB-C: 45W+20W (65W Max)
USB-C+USB-A: 5V/4.5A (22.5W Max)
Cable-C+USB-C+USB-A: 45W+5V/4.5A (67.5W Max)

10000mAh 35W Powerbank With Build in Cable

- Safe Protection
- Nano Size
- PD35W Max
- Charge While Using
- 10000mAh Battery
- Build-in Cable
- 3 Devices Charging

CE FC RoHS compliant UN38.3

20000mAh PD100W Laptop Powerbank

CE FC RoHS compliant UN38.3

PD28L (Build in Cable)

Appearance process: Texturing+Glossy polishing
Cell capacity: 5000mAh, 7.3V/36.5Wh
Total capacity: 10000mAh, 5000mAh*2
Dimension: 88*64*26.6 mm
Weight: 190g

Input
USB-C/Cable-C: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A (30W Max)
Output:
5V/3A, 9V/3A, 12V/2.92A, 15V/2.33A, 20V/1.75A (35W Max)
PPS: 3.3-11V/3A, PPS: 3.3-16V/2A
USB-A: 5V/3A, 9V/2A, 12V/1.5A, 10V/2.25A (22.5W Max)
USB-C+Cable-C+USB-A: 5V/4.5A (22.5W Max)

PD29L

Appearance process: Texturing+Glossy polishing
Cell capacity: 5000mAh, 7.3V/36.5Wh
Total capacity: 10000mAh, 5000mAh*2
Dimension: 83*60*26.6mm
Weight: 180g

Input:
USB-C: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A (30W Max)
Output:
5V/3A, 9V/3A, 12V/2.92A, 15V/2.33A, 20V/1.75A (35W Max)
PPS: 3.3-11V/3A, PPS: 3.3-16V/2A
USB-A: 5V/3A, 9V/2A, 12V/1.5A, 10V/2.25A (22.5W Max)
USB-C+USB-A: 5V/4.5A (22.5W Max)

- PD3.0 Fast Charging
- 4 Devices Charging
- LED Display
- PD100W Ultimate Loading
- Plug-And-Play
- 20000mAh
- Flat Size

PD31

Appearance process: Painting
Cell capacity: 5000mAh, 14.8V/74Wh
Total capacity: 20000mAh, 5000mAh*4
Dimension: 131.8*133.8*20mm
Weight: 430g

Input:
USB-C1/C2: DC5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A
Output:
USB-C1/C2: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A (100W Max)
USB- A1/A2: 5V/3A, 9V/3A, 10V/2.25A, 12V/2.5A (30W Max)
USB-C1+ USB-A1: 5V/3A (15W Max)
USB-C2+ USB-A2: 5V/3A (15W Max)
USB-C1+ USB-A2: 65W+30W (95W Max)
USB-C2+ USB-A1: 65W+30W (95W Max)
USB-C1+USB-C2: 65W+30W (95W Max)
Total: 5V/3A+ 5V/3A (30W Max)

25000mAh 100W Powerbank With Handle

Safe Protection

PD100W

25000mAh Battery

Plug & Play

Charge While Using

3 Devices Charging

Leather Handle

PD24

Appearance process: Texturing
Cell capacity: 5000mAh, 18.25V/91.25Wh
Total capacity: 25000mAh, 5000mAh*5
Dimension: 72*72*149.6mm
Weight: 550g

Input:
USB-C1/C2: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A (65W Max)
Output:
USB-C1/C2: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A (100W Max)
PPS: 3.3V-20V/5A (100W Max)
USB-A: 5V/2.4A, 9V/2A, 12V/1.5A (30W Max)
C1+C2: 60W+45W (105W Max)
C1/C2+A: 90W+18W (108W Max)
C1+C2+A: 60W+30W+18W (108W Max)

5000mAh 22.5W Capsule Powerbank With Foldable Stand

Safe Protection

Nano Size

PD22.5W Max

5000mAh Battery

Foldable USB-C Plug

2 Devices Charging

PD26 (No Stand)

Appearance process: Texturing+Glossy polishing
Cell capacity: 5000mAh, 3.65V/18.25Wh
Total capacity: 5000mAh, 5000mAh*1
Dimension: 76.6*38*26.3mm
Weight: 98.5g

Input:
USB-C1(male): 5V/3A, 9V/2A, 12V/1.5A (18W Max)
USB-C2: 5V/3A, 9V/2A, 12V/1.5A (18W Max)
Output:
USB-C1(male): 5V/3A, 9V/2.22A, 12V/1.67A, 10V/2.25A (22.5W Max)
USB-C2: 5V/3A, 9V/2.22A, 12V/1.67A, 10V/2.25A (22.5W Max)

PD27 (Build in Stand)

Appearance process: Texturing+Glossy polishing
Cell capacity: 5000mAh, 3.65V/18.25Wh
Total capacity: 5000mAh, 5000mAh*1
Dimension: 76.6*38*28.7mm
Weight: 110g

Input:
USB-C1(male): 5V/3A, 9V/2A, 12V/1.5A (18W Max)
USB-C2: 5V/3A, 9V/2A, 12V/1.5A (18W Max)
Output:
USB-C1(male): 5V/3A, 9V/2.22A, 12V/1.67A, 10V/2.25A (22.5W Max)
USB-C2: 5V/3A, 9V/2.22A, 12V/1.67A, 10V/2.25A (22.5W Max)

20000mAh 65W Laptop Powerbank

- Safe Protection
- Charge While Using
- PD65W Fast Charging
- 20000mAh
- 3 Devices Charging

PD06A

Appearance processing: Painting
Capacity 4000mAh 18.5V/74Wh
Total capacity: 20000mAh, 4000mAh*5
Dimension: 83*162*26mm
Weight: 470.5g
Input:
USB-C1: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A (65W Max)
Output:
USB-C1: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A (65W Max)
PPS: 3.3-16V/2A (32W Max)
USB-C2: 5V/3A, 9V/3A, 12V/2.5A (30W Max)
USB-A: 5V/3A, 9V/2A, 12V/1.5A 10V/2.25A (22.5W Max)
C1+C2: 45W+30W (75W Max)
C1+A: 45W+22.5W (67.5W Max)
C2+A: 5V3A (15W Max)
C1+C2+A: 45W+ 5V/3A (60W Max)

PD20W LED Display Powerbank

Safe Protection | PD20W | Powerful | 3 Devices Charging | Charge While Using

PD17

Appearance processing: Texturing+Glossy polishing
Cell capacity: 10000mAh, 3.7V/37Wh
Total capacity: 10000mAh, 10000mAh*1
Dimension: 126*70*19mm
Weight: 215g

Input:
USB-C1/C2: 5V/3A, 9V/2.22A, 12V/1.67A (20W Max)
Output:
USB-C1/C2: 5V/3A, 9V/2.22A, 12V/1.67A (20W Max)
PPS: 5-11V/2A (22W Max)
USB-A: 5V/3A, 9V/2A, 12V/1.5A (18W Max)
A+C1+C2: 5V/3A (15W Max)

PD18

Appearance processing: Texturing+Glossy polishing
Cell Capacity: 10000mAh, 7.4V/74Wh
Total Capacity: 20000mAh, 10000mAh*2
Dimension: 150*72*24.5mm
Weight: 375g

Input:
USB-C1/C2: 5V/3A, 9V/2.22A, 12V/1.67A (20W Max)
Output:
USB-C1/C2: 5V/3A, 9V/2.22A, 12V/1.67A (20W Max)
PPS: 5-11V/2A (22W Max)
USB-A: 5V/3A, 9V/2A, 12V/1.5A (18W Max)
A+C1+C2: 5V/3A (15W Max)

PD3.0 Metal Shell Portable Powerbank

Safe Protection | Metal Shell | PD22.5W/30W | Powerful | 3 Devices Charging | Charge While Using

PD3.0 Fast Charging Portable Powerbank

Safe Protection | PD20W/PD30W | Powerful | 3 Devices Charging | Charge While Using

PD20

Appearance processing: Aluminum alloy casing+Oxidation sandblasting
Cell capacity: 10000mAh, 3.7V/37Wh
Total capacity: 10000mAh, 10000mAh*1
Dimension: 146*74.4*13.5mm
Weight: 278g

Input:
USB-C1/C2: 5V/3A, 9V/2.22A, 12V/1.67A (20W Max)

Output:
USB-C1/C2: 5V/3A, 9V/2.22A, 12V/1.67A (20W Max)
USB-A: 5V/3A, 9V/2A, 12V/1.5A, 10V/2.25A (22.5W)
A+C1+C2: 5V/3A (15W Max)

PD21

Appearance processing: Aluminum alloy casing+Oxidation sandblasting
Cell capacity: 10000mAh, 7.4V/74Wh
Total capacity: 20000mAh, 10000mAh*2
Dimension: 150.5*74.4*23.5mm
Weight: 470g

Input:
USB-C1/C2: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A (30W Max)

Output:
USB-C1/C2: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A (30W Max)
PPS: 3.3-11V/3A, PPS: 3.3-16V/2A
USB-A: 5V/3A, 9V/2A, 10V/2.25A, 12V/1.5A (22.5W Max)
A+C1+C2: 5V/4.5A (22.5W Max)

PD22

Appearance processing: Texturing+Glossy polishing
Cell capacity: 10000mAh, 3.7V/37Wh
Total capacity: 10000mAh, 10000mAh*1
Dimension: 68.4*16*150 mm
Weight: 215g

Input:
USB-C1/C2: 5V/3A, 9V/2.22A, 12V/1.67A (20W Max)

Output:
USB-C1/C2: 5V/3A, 9V/2.22A, 12V/1.67A (20W Max)
USB-A: 5V/3A, 9V/2A, 12V/1.5A, 10V/2.25A (22.5W Max)
A+C1+C2: 5V/3A Max

PD23

Appearance processing: Texturing+Glossy polishing
Cell capacity: 10000mAh, 7.4V/74Wh
Total capacity: 20000mAh, 10000mAh*2
Dimension: 68.4*29*150mm
Weight: 395g

Input:
USB-C1/C2: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A (30W Max)

Output:
USB-C1/C2: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A (30W Max)
PPS: 3.3-11V/3A, PPS: 3.3-16V/2A
USB-A: 5V/3A, 9V/2A, 10V/2.25A, 12V/1.5A (22.5W Max)
A+C1+C2: 5V/4.5A (22.5W Max)

Qi2 & MagSafe Charger

Qi2.2 10000mAh 30W 0.96' TFT Wireless Powerbank

- New Qi2.2 Protocol
- For iPhone16/15/14/13/12
- Leather Magnetic Stand
- Small Size
- Wireless 25W Max
- 10000mAh
- PD30W Max

WPB13

Appearance process: Painting
Battery capacity: 5000mAh, 7.2V/36Wh
Total capacity: 10000mAh, 5000mAh*2
Magnetic strength: 12N
Dimension: 102*68.6*17.3mm
Weight: 230g

Input:
USB-C: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A (30W Max)

Output:
USB-C: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A (30W Max)
Wireless TX: 25W Max
Total: 5V/3A+5W

Qi2 10000mAh 30W Wireless Powerbank With Foldable Leather Stand

New Qi2 Protocol

For iPhone16/15/14/13/12

Leather Magnetic Stand

Small Size

Wireless 15W Max

10000mAh

PD30W Max

WPB10-Q

Appearance process: Painting
Cell capacity: 5000mAh, 7.2V/36Wh
Total capacity: 10000mAh, 5000mAh*2
Magnetic strength: 10N
Dimension: 68*20*103mm
Weight: 228g

Input:
USB-C: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A (30W Max)
Output:
USB-C: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A (30W Max)
Wireless TX : 15W Max
Total: 5V/3A+5W

Qi2 20W/30W Slim Wireless Powerbank

New Qi2 Protocol

For iPhone16/15/14/13/12

Small Size

Wireless 15W Max

WPB11

Appearance process: Painting
Cell capacity: 5000mAh, 3.7V/18.5Wh
Total capacity: 5000mAh, 5000mAh*1
Magnetic strength: 10N
Dimension: 103*11.5*64mm
Weight: 120g

Input:
USB-C/Cable-C: 5V/3A, 9V/2A, 12V/1.5A(18W Max)
Output:
USB-C/Cable-C: 5V/3A, 9V/2.22A, 10V/2.25A, 12V/1.67A (22.5W Max)
Wireless TX: 15W Max
Total: 15W Max

WPB12

Appearance process: Painting
Cell capacity: 5000mAh, 7.4V/37Wh
Total capacity: 10000mAh, 5000mAh*2
Magnetic strength: 10N
Dimension: 108*69*19.5mm
Weight: 180g

Input:
USB-C/Cable-C: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A (30W Max)
Output:
USB-C/Cable-C: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A (30W Max)
Wireless TX: 15W Max
Total: 5V/3.6A (18W Max)

Qi2.2 3-in-1 Wireless Charging Station

- New Qi2.2 Protocol
- For iPhone16/15/14/13/12
- Foldable
- Small Size
- Wireless 25W Max
- 3 in 1

WCM18

Appearance process: Painting
Magnetic strength: 12N
Dimension: 95*60*25mm
Weight: 200g

Input:
USB-C: 9V/3A, 12V/3A, 15V/3A (45W Max)

Output:
Wireless TX: 25W Max/5W Max/5W Max
Phone: 25W Max
Apple Watch: 5W Max
TWS: 5W Max

Qi2.2 3-in-1 Wireless Charger With Foldable Phone Holder & Detachable Car Holder

- New Qi2.2 Protocol
- For iPhone16/15/14/13/12
- Build in Foldeable Phone Stand
- Small Size
- Wireless 25W Max
- Detachable Car charger Stand

WIM13

Appearance process: Texturing
Magnetic strength: 12N
Dimension: 60*60*13mm
Weight: 120g

Input:
USB-C: 5V/2A, 9V/3A, 15V/2A , 20V/1.5A (30W Max)

Output:
Wireless TX: 25W Max

Q

5000mAh Apple Watch Powerbank With Dock

Made for WATCH

- Charge While Using
- Slim And Portable
- Safe Protection
- 5000mAh
- Devided Dock & Power Bank

WDC12

Appearance process: Painting
Cell capacity: 5000mAh, 3.6V/18Wh
Total capacity: 5000mAh, 5000mAh*1
Dimension: 77*62*127 mm
Weight: 270g

Input:
USB-C: 5V/3A (15W Max)

Output:
USB-C: 5V/3A (15W Max)
USB-A: 5V/2.4A (12W Max)
Apple Watch: 5W Max

W

Mag Wireless Car Charger

- 15W Fast Wireless Charging
- For iPhone16/15/14/13/12
- Small Size
- 360 Rotation Pad
- Adaptable For Various Cars

WCC08

Appearance process: Painting
Dimension: 62*62*15 mm
Weight: 60g

Input:
USB-C: 5V/2A, 9V/2A, 12V/1.5A (18W Max)

Output:
Magnetic wireless: 15W Max

Conversion efficiency: ≥72%
Transmission distance: <8mm

5000mAh 18W Mag Wireless Powerbank

- 5000mAh
- 15W Magnetic Wireless Charging
- Charge While Using
- Compact Size
- For iPhone16/15/14/13/12

WPB02-M

Appearance process: Painting
Cell capacity: 5000mAh, 3.7V/18.5Wh
Total capacity: 5000mAh, 5000mAh*1
Dimension: 64*95*14mm
Weight: 139g

Input:
USB-C: 5V/2A, 9V/1.5A (13.5W Max)

Output:
USB-C: 5V/2A, 9V/1.5A, 12V/1.1A (13.2W Max)
Wireless output: 5W/7.5W/10W

10000mAh 20W Mag Wireless Powerbank

- 15W Magnetic Wireless Charging
- PD20W
- 10000mAh
- Small Size
- For iPhone16/15/14/13/12

WPB05-FX

Appearance process: Painting
Cell capacity: 10000mAh, 3.85V/38.5Wh
Total capacity: 10000mAh, 10000mAh*1
Dimension: 104*69*18mm
Weight: 203.5g

Input:
USB-C: 5V/3A, 9V/2A (18W Max)

Output:
USB-C: 5V/3A, 9V/2.22A, 12V/1.5A (20W Max)
USB-A: 5V/3A, 9V/2A, 12V/1.5A (18W Max)
Wireless output: 10W/7.5W/5W

10000mAh 20W Mag Wireless Powerbank With Foldable AC Plug

Foldable Plug

PD20W

10000mAh

15W Magnetic Wireless Charging

3 Devices Charging

For iPhone16/15/14/13/12

WPB06

Appearance process: Painting
Cell capacity: 10000mAh, 3.85V/38.5Wh
Total capacity: 10000mAh, 10000mAh*1
Dimension: 135*70*24.5mm
Weight: 280g

Charger Mode:
AC In: 100-240V, 50/60Hz, 0.35A
Output: USB-A/C: 5V/2.4A (12W Max)

Powerbank Mode:
Input:
USB-C: 5V/3A, 9V/2A (18W Max)
Output:
USB-C: 5V/3A, 9V/2.22A, 12V/1.67A (20W Max)
USB-A: 5V/3A, 9V/2A, 12V/1.5A (18W Max)
USB-A+USB-C: 5V/3A (15W Max)
Wireless output: 10W/7.5W/5W

3-in-1 Charging Dock With 10000mAh 18W Wireless Powerbank

Devided Dock & Power Bank

For iPhone & AirPods

15W Wireless Charging

3 Devices Charging

10000mAh

LED Clock

Powerbank

Appearance process: Painting
Cell capacity: 10000mAh, 3.7V/37Wh
Total capacity: 10000mAh, 10000mAh*1
Dimension: 152*75*15mm
Weight: 315g

Input:
USB-C: 5V/3A, 9V/2A, 12V/1.5A (18W Max)

Output:
USB-C: 5V/3A, 9V/2.22A, 12V/1.5A (18W Max)
USB-A: 5V/3A, 9V/2A, 12V/1.5A (20W Max)
Wireless output: 10W/7.5W/5W

WDC07 Dock

Dimension: 98*105*35 mm
Weight: 123.3g
Input:
USB-C: 9V/2A, 12V/1.5A (18W Max)
Output:
Pogo Pin: 9V/2A (18W Max)
Wireless for Airpods: 5W

WDC08 Dock

Dimension: 190*100*29 mm
Weight: 159g
Input:
USB-C: 9V/4A (36W Max)
Output:
Wireless: 10W Max
USB-A: 5V/2A (10W Max)
Pogo pin: 9V/2A (18W Max)

WDC11 Dock

Dimension: 98*105*35 mm
Weight: 123.3g

Input:
USB-C: 9V/2A, 12V/1.5A (18W Max)

Output:
Pogo Pin: 9V/2A (18W Max)
USB-A: 5V/1A (5W)
Wireless for Airpods: 5W

GaN Charger

100W/140W GaN Charger With Foldable Plug

G10002

Appearance processing: Texturing
Dimension: 62*62*31.5mm
Weight: 230g

Input:
AC In: 100-240V, 50/60Hz, 1.5A Max

Output:
USB-C1/C2: 5V/3A, 9V/3A, 12V3A, 15V/3A, 20V/5A (100W Max)
PPS: 3.3V-16V/5A (80W Max)
USB-A: 5V/3A, 9V/3A, 12V2.5A, 20V/1.5A (30W Max)
C1+C2: 70W+30W (100W Max)
C1+A: 70W+30W (100W Max)
C2+A: 10W+5W (15W Max)
C1+C2+A: 70W+10W+5W (85W Max)

G14002

Appearance processing: Texturing
Dimension: 69*69*33.4mm
Weight: 280g

Input:
AC In: 100-240V, 50/60Hz, 1.8A Max
Output:
USB-C1: 5V/3A, 9V/3A, 12V3A, 15V/3A, 20V/5A , 28V/5A (140W Max)
USB-C2/C3: 5V/3A, 9V/3A, 12V3A, 15V/3A, 20V/5A (100W Max)
PPS: 3.3V-21V/5A (100W Max)
USB-A: 5V/3A, 9V/3A, 12V1.5A (18W Max)
C1+C2/C3: 100W+30W (130W Max)
C1/C2+A: 100W+18W (118W Max)
C3+A: 10W+10W (20W Max)
C1+C2+C3: 70W+30W+30W (130W Max)
C1+C2+A: 70W+30W+18W (118W Max)
C1/C2+C3+A: 100W+10W+10W (120W Max)
C1+C2+C3+A: 70W+30W+10W+10W (120W Max)

67W Retractable Cable GaN Charger

- Retractable Cable 70cm
- PD67W
- GaN III Technology
- 3 Devices Charging
- Foldable Plug
- Universal Plug Compatibility

G6702

Appearance processing: Texturing+Glossy polishing
Dimension: 51*51*58.4mm
Weight: 200g

Intput:
AC In: 100-240V, 50/60Hz, 1.5A Max

Output:
USB-C/Cable-C: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.35A (67W Max)
PPS: 3.3-21V/3A (63W Max)
USB-A: 5V/3A, 9V/3A, 10V/2.25A, 12V/2.5A (30W Max)
USB-C+USB-A: 5V/3A (15W Max)
Cable-C+USB-A: 45W+18W (63W Max)
Cable-C+USB-C: 45W+20W (65W Max)
Total: 45W+15W (60W Max)

65W Slim GaN Charger

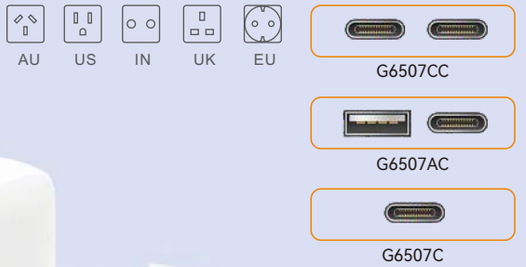

G6507CC

Appearance processing: Texturing
Dimension: 85*45.8*14.6mm
Weight: 89.5g

AC In: 100-240V, 50/60Hz, 1.5A Max

Output:
USB-C1: 5V/3A, 9V/3A, 12V/3A, 15V/3A,
20V/3.25A (65W Max)
PPS: 5V-11V/5A
USB-C2: 5V/3A, 9V/2A, 12V/1.5A (18W Max)
USB-C1+USB-C2: 5V/3A, 9V/3A, 12V/3A, 15V/3A,
20V/2.25A
PPS: 5V-11V/4.05A +5V/2.4A

G6507AC

AC In: 100-240V, 50/60Hz, 1.5A Max
Output:
USB-C: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A (65W Max)
PPS: 5-11V/5A (55W Max)
USB-A: 5V/3A, 9V/2A, 12V/1.5A (18W Max)
USB-C+USB-A: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/2.25A (45W Max)
PPS: 5V-11V/4.05A +5V/2.4A

G6507C

AC In: 100-240V, 50/60Hz, 1.5A Max
Output:
USB-C: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A (65W Max)
PPS: 5-20V/3A (60W Max)

20W/45W GaN Charger

- PD20W/45W
- GaN III Technology
- Universal Plug Compatibility
- 2 Devices Charging
- Nano Size

G2001

Appearance processing: Texturing
Intput:
AC In: 100-240V, 50/60Hz, 0.8A Max

Output:
USB-C: 5V/3A, 9V/2.22A (20W Max)
PPS: 5V-11V/2A (22W Max)
Dimension: 31.5*31.5*48.4mm
Weight: 41g

G4002

Appearance processing: Texturing
Intput:
AC In: 100-240V, 50/60Hz, 1.5A Max

Output:
USB-C1/C2: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/2.25A (45W Max)
PPS: 3.3V-11V/4.05A (45W Max)
USB-C1+USB-C2: 20W+20W (40W Max)
Dimension: 48*48*30.7mm
Weight: 87.6g

35W GaN Charger With Foldable Plug

AU US IN UK EU

- GaN III Technology
- Nano Size
- PD35W
- Foldable Plug
- Universal Plug Compatibility

G3301

Appearance processing: Texturing+Glossy polishing
Dimension: 32*32*34mm
Weight: 87g

Intput:
AC In: 100-240V, 50/60Hz, 0.8A Max

Output:
USB-C: 5V/3A, 9V/3A, 12V/2.5A, 15V/2.2A, 20V/1.75A (35W Max)
PPS: 3.3V-11V/3A (33W Max)

65W/70W GaN Charger With Foldable Plug

G6501

Appearance processing: Texturing+Glossy polishing
Dimension: 31*40*62mm
Weight: 200g

Input:
AC In: 100-240V, 50/60Hz, 1.5A Max
Output:
USB-C1/C2: 5V/3A, 9V/3A, 12V3A, 15V/3A, 20V/3.25A (65W Max)
PPS: 3.3V-21V/3A (63W Max)
USB-A: 5V/3A, 9V/3A, 10V/2A, 12V2.5A (30W Max)
C1+C2: 45W+20W (65W Max)
C1+A: 45W+18W (63W Max)
C2+A2: 10W+5W (15W Max)
C1+C2+A: 45W+10W+5W (60W Max)

G7002

Appearance processing: Texturing+Glossy polishing
Dimension: 31*40*62mm
Weight: 200g

Input:
AC In: 100-240V 50/60Hz, 1.5A Max
Output:
USB-C1/C2: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.5A(70W Max)
USB-A: 5V/3A, 9V/3A, 12V/2.5A (30W Max)
PPS: 3.3-21V/ 3A (63W Max)
C1+C2: 45W+20W (65W Max)
C1+A: 45W+18W (63W Max)
C2+A: 10W+5W(15W Max)
C1 +C2+A: 45W+ 10W+5W(60W Max)

100W GaN Charger With Foldable Plug

- GaN III Technology
- 3 Devices Charging
- PD100W
- Foldable Plug
- Universal Plug Compatibility

G10001

Appearance processing: Texturing+Glossy polishing
Dimension: 32*64.5*68.5mm
Weight: 300g

Input:
AC In: 100-240V, 50/60Hz, 1.5A Max
Output:
USB-C1/C2: 5V/3A, 9V/3A, 12V3A, 15V/3A, 20V/5A (100W Max)
PPS: 3.3V-16V/5A (80W Max)
USB-A: 5V/3A, 9V/3A, 12V2.5A, 20V/1.5A (30W Max)
C1+C2: 70W+30W (100W Max)
C1+A: 70W+30W (100W Max)
C2+A: 10W+5W (15W Max)
C1+C2+A: 70W+10W+5W (85W Max)

G

140W GaN Charger With Foldable Plug

GaN III Technology

PD140W

3 Devices Charging

Foldable Plug

Universal Plug Compatibility

G14001

Appearance processing: Texturing+Glossy polishing
Dimension: 33.6*75*71.4mm
Weight: 450g
Input:
AC In: 100-240V, 50/60Hz, 1.8A Max
Output:
USB-C1: 5V/3A, 9V/3A, 12V3A, 15V/3A, 20V/5A, 28V/5A (140W Max)
USB-C2/C3: 5V/3A, 9V/3A, 12V3A, 15V/3A, 20V/5A (100W Max)
PPS: 3.3V-21V/5A (100W Max)
USB-A: 5V/3A, 9V/3A, 12V1.5A (18W Max)

C1+C2/C3: 100W+30W (130W Max)
C1/C2+A: 100W+18W (118W Max)
C3+A: 10W+10W (20W Max)
C1+C2+C3: 70W+30W+30W (130W Max)
C1+C2+A: 70W+30W+18W (118W Max)
C1/C2+C3+A: 100W+10W+10W (120W Max)
C1+C2+C3+A: 70W+30W+10W+10W (120W Max)

S

Portable Power Station

600W Portable Power Station

- Compact & Conven
- LiFePO4 Battery Over 3000 Cycle
- 560Wh Power 600W Power
- Strong Compatibility
- HD Screen
- Pure Sine Wave

TB600

Nominal capacity: 556.8Wh (19.2V/29Ah)
Nominal power: 600W, peak 1200W
Cell type: LiFePO4 (Battery cycles > 3000)
Size: 288*155*240mm
Weight: 7.5kg

Input:
DC: 22V/5.45A, Max 120W
Type-C: 20V/5A, Max 100W
Output:
2×AC: (US/JP) AC 100-120V, (EU/AU/UK/ZA) AC 220-240V
1×USB-C: 100W Max
3×USB-A: 18W Max
1×Car socket: 13V/10A
2×DC5521: 13V/3A

1200W Portable Power Station

- LiFePO4 Battery Over 3000 Cycle
- 1152Wh Battery 1200W Power
- Strong Compatibility
- HD Screen
- Pure Sine Wave
- Zoning Switch Control

TB1200

Nominal capacity: 1152Wh (25.6V/45Ah)
Nominal power: 1200W, peak 1800W
Cell type: LiFePO4
Size: 365.4*235*274.5mm
Weight: 13kg

Input:
AC(JP/US) 90-120V, (EU/AU/ZA) 200-240V
XT60: 11.5-55V (Max 550W)
DC5521: 12V/10A, 24V/10A
MPPT charging: Support MPPT charging solar MPPT charging
Output:
2×USB-C: PD100W Max
2×USB-A: 18W Max
1×Car socket: 13V/8A, 100W Max
1×DC5521: 13V/8A, 100W Max

TB1600

- LiFePO4 Battery Over 3000 Cycle
- 1536Wh Battery 1600W Power
- Strong Compatibility
- HD Screen
- Pure Sine Wave
- Zoning Switch Control

Nominal capacity: 1536Wh (25.6V/60Ah)
Nominal power: 1600W(continuous), 1800W(6-8 minutes), 3000W(peak)
Cell type: LiFePO4
Size: 370*311.5*235mm
Weight: 16kg

Input:
AC input: (JP/US)90-140V, (EU/AU/ZA)180-250V
XT60 charge port: 11.5V~55V (550W Max)
DC5521: 12V/10A, 24V/10A (220W Max)
Output:
2×USB-C: PD100W Max
4×USB-A: 18W Max
1×Car Socket: 13V/10A, 130W Max
1×DC5521: 13V/3A, 39W Max

TB3600

- LiFePO4 Battery Over 3000 Cycle
- 3072Wh Battery 3600W Power
- Strong Compatibility
- HD Screen
- Pure Sine Wave
- Overlay Packet Design
- Easy Trailer

Host Parameters:
Input battery voltage range: 44.8-57.6V
Input:
Xt60 charge port: 11-100V, Max 1000W (Xt60)
AC Input: (JP/US)90-120V, 50/60Hz, Max 1800W
(EU/AU)200-240V, 50/60Hz, Max 1800W

Output:
3×AC: (US/JP)AC 3*20A output port+
1*30A output port AC 100-120V/2400W
3×AC: (EU/AU) AC 3*AC output AC200-240V/3600W
2*USB-A: 5V/3A, 9V/2A, 12V/1.5A (QC 3.0)
2*USB-C: 5V/ 9V/ 12V/ 15V/ 20V, 5A Max.(PD100W)
1*Car Socket: 12V/15A Max
1*Anderson out: 12V/50A Max
Dimension (W*D*H): 465*306*192mm
Weight: 12kg

Battery Parameters:
Nominal capacity: 3072Wh
Dimension (W*D*H): 465*306*249mm
Weight: 29kg
Battery pack mode: 40138(LiFePO4)
Cells compound mode: 16S3P
Battery pack voltage: 51.2V

Solar Folding Bag




Model	TB280W_SP_23V	TB100W_SP_20V	TB280W_SP_SC_23V	TB130W_SP_SC_20V
Max. power voltage (Vm)	23V±5%	19.8V±5%	23V ±5%	20V ±5%
Max. power (Ppm)	280W±5%	100W±5%	280W±5%	130W±5%
No. of cells of connections	80=4x5PCSx4	36=2x6PCSx2	168=3x14PCSx4	72=4x9PCSx2
Dimension(unfolded)	663*2349*25mm	536*1228*25mm	693*2525*25mm	700*1244*25mm
Dimension(folded)	663*616*54mm	536*608*38mm	693*660*54mm	700*616*38mm
Weight	9kg±0.3kg	3.6kg±0.3kg	13.56kg±0.3kg	9kg±0.3kg

Notes